

M860

Solar Powered LED Marine Lantern, 4 to 7+ NM Range

With a durable, large-format solar engine, the M860 is engineered for consistent, reliable performance at remote installations and in challenging insolation locations. This is a premium and full-featured lantern that is suitable for achieving longer ranges in challenging insolation locations. To view performance in your installation location, visit www.sabik-marine.com

- ->Marine Selector Tool
- Option for standard or wide divergences (for fixed or floating applications)
- Multiple cost-effective battery pack options suitable for a wide variety of installation locations
- Built-in calendar function for automatic de-activation during off-season months
- Top-mounted 4-character LED display with simple »tap to activate« functionality
- Premium grade, UV resistant polycarbonate lens material
- Environmentally friendly, super durable powder-coated aluminium chassis
- · Adjustable intensity and range
- IP 68 rated
- GPS synchronized flash option
- Remote monitoring options available












Top-mounted Display Easily check light settings with a »tap-to-activate« digital display.



Infrared Programmer Check battery state of charge, program flash codes, set intensities and more.



Optical Assembly
Durable, UV resistant optical
lens with options for standard
(8°) or wide (10°) divergence.



Scalable Battery Pack
Multiple replaceable,
recyclable battery pack options
for reliable, cost-effective
performance in a variety of
installation locations.




Visible Colour Indicator LED colour is clearly indicated by the colour of the lantern head.




External Charge Port
Optional charge port in the
lantern base allows for easy
overnight charging via wall
plug.



Installation
Supports installation on structure using 3 x M12 bolts, 4 x M12 bolts, or 5 x M12 bolts on a 200 mm diameter. Standard and security bolt kits are available.



Bird Deterrent
Stainless steel bird deterrents.
Five deterrents supplied
with option for up to ten per
lantern.




Solar Modules
High efficiency cells protected
by rugged powder-coated
aluminium extrusion.



Monitoring Optional integrated satellite modem and antenna for remote monitoring. For more information, please see the LightGuard section.



Technical Specification M860

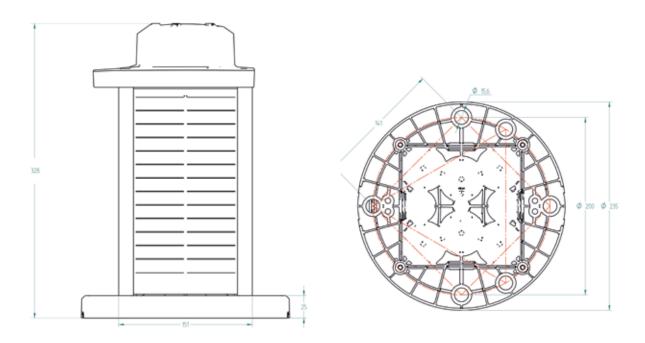

Optical performance

| Maximum fixed intensity | | | | | | |
|-------------------------|--------|--------|--------|--------|--|--|
| M860 | 239 cd | 290 cd | 445 cd | 320 cd | | |

NOTE: Peak IALA intensity dependent on location. To view performance in your installation location, visit www.carmanahmarine.com/selector.

Main Technical Specification

| Lens visual/Mechanical diameter | 111 mm | | |
|--|--|--|--|
| Construction | Premium grade, UV resistant polycarbonate lens/head and polycarbonate/polysiloxane co-polymer base | | |
| Light source | High Flux Surface Mount LEDs with co- lour-specific temperature-corrected LED driver | | |
| Vertical Divergence | 8º or 10º (FWHM) | | |
| Solar modules | High-efficiency cells; MPPT | | |
| Battery | Multiple replaceable, recyclable battery options (refer to options matrix) | | |
| Degree of ingress protection | IP 68 immersion | | |
| Weight 6.4 kg M860 96E 10.2 kg M860 200BC | | | |
| Overall height | 328 mm | | |
| Overall width | 235 mm dia. | | |
| Installation | 3, 4 or 5 x M12 on 200 mm dia. | | |



Order Overview M860

Option matrix

| Model | Colour Options | Battery | Lens | Control | Charge Port |
|-------|----------------|-------------|---------------|--------------|------------------|
| | Red | | | | With External |
| N4000 | White | 96E | Standard (8°) | GPS Sync | Chargeport |
| M860 | Green | | Wide (10°) | Non-GPS Sync | Without External |
| | Yellow | | | , | Chargeport |

Accessories

| 71757 | M800 Series Standard Bolt Kit | |
|--------------|---|--|
| 71884 | M800 Series Security Bolt Kit (drivers not included) | |
| 53288 | M800 Series Security Key | |
| 53289 | M800 Series Security Socket | |
| 69885 | M800 Series AC/DC 12V-2.5A Charger, International Plug Adapters | |
| 69934 | Bird Deterrent (single) | |
| 69955 | M800 Series Battery Replacement Kit - 96 Wh | |
| 69956 | M800 Series Battery Replacement Kit - 200 Wh | |
| HEAD KIT | M800 Series Head Replacement Kit (please specify colour at time of order) | |
| HEAD KIT GPS | M800 Series GPS Head Replacement Kit (please specify colour at time of order) | |
| 69899 | Remote Control | |

Product codes

| Colour | M860 96E (with 96Wh battery) | M860 200BC (with 200Wh battery) | M860 96E GPS (with 96Wh battery) | M860 200BC GPS (with 200Wh battery) |
|--------|---------------------------------|------------------------------------|-------------------------------------|--|
| red | M860R-96E | M860R-200BC | M860R-96EGPS | M860R-200BCGPS |
| green | M860G-96E | M860G-200BC | M860G-96EGPS | M860G-200BCGPS |
| white | M860W-96E | M860W-200BC | M860W-96EGPS | M860W-200BCGPS |
| yellow | M860Y-96E | M860Y-200BC | M860Y-96EGPS | M860Y-200BCGPS |